
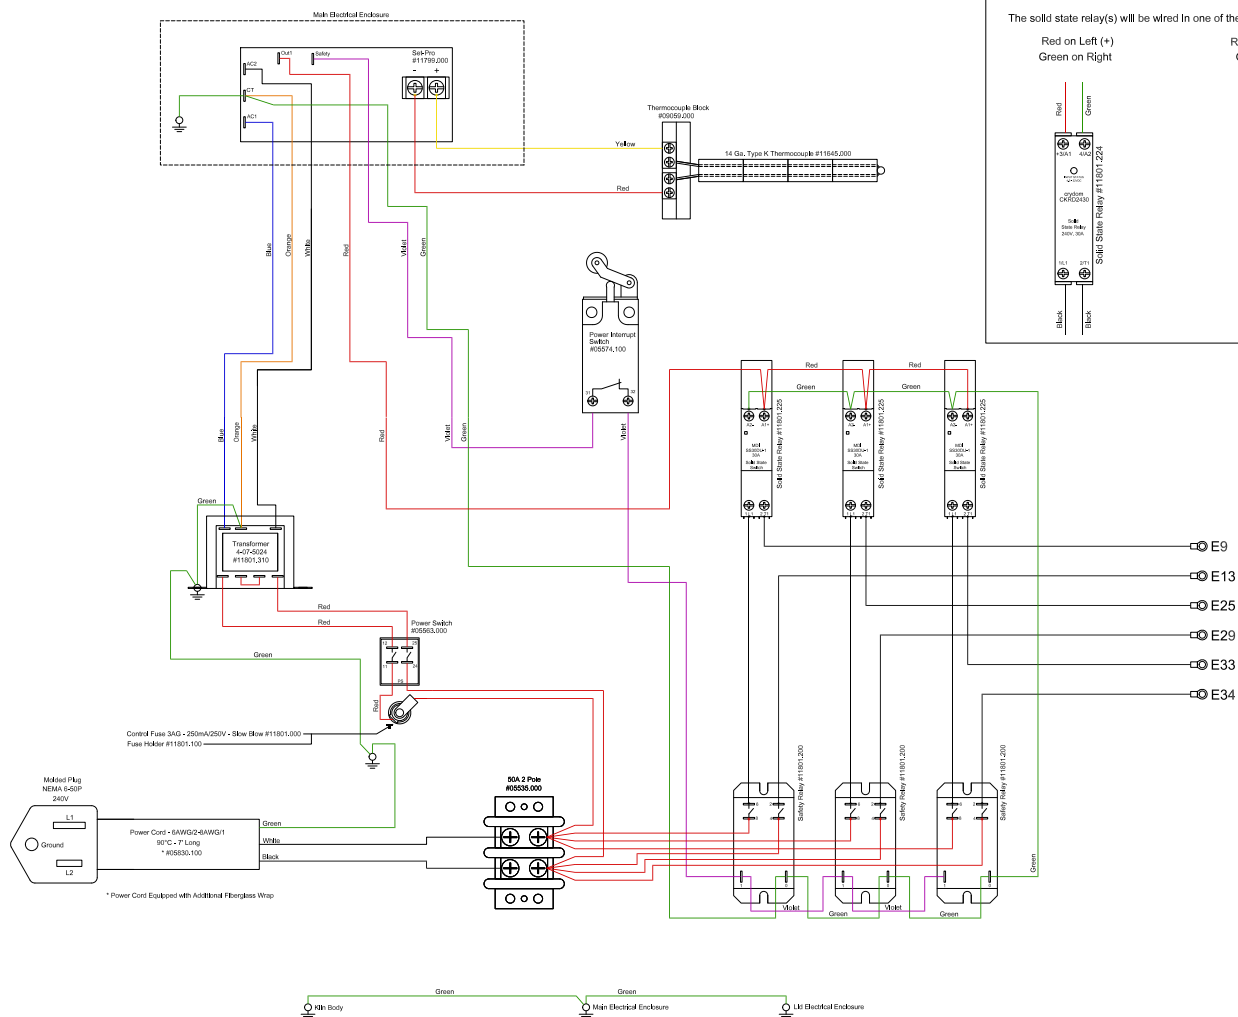
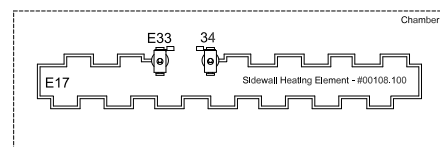
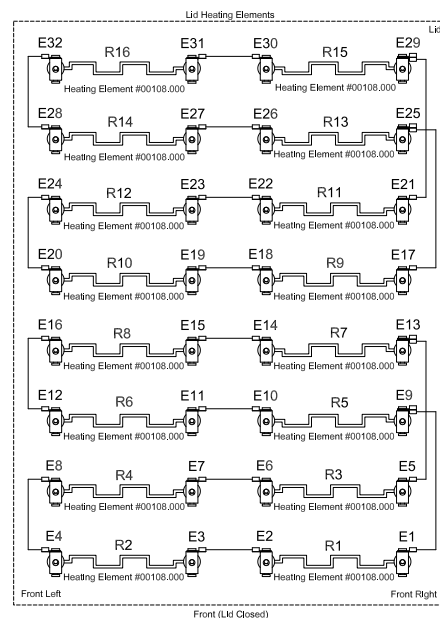


The solid state relay(s) will be wired in one of the following two ways

Red on Left (+)
Green on Right

Red on Right (+)
Green on Left



* Power Cord Equipped with Additional Fiberglass Wrap

evenheat
www.evenheat-kiln.com


DATE:
05/23/16

Evenheat Kiln, Inc. Phone 989-856-2281
PO Box 399 Fax 989-856-4040
Caseville, MI 48725

Model: GTS 41-13 STP SS 240V w/ PI

Pane| 11-16

240V	45A	10,800W	1Ph.	DOC #: GTS4113STPSS240V PI
------	-----	---------	------	----------------------------

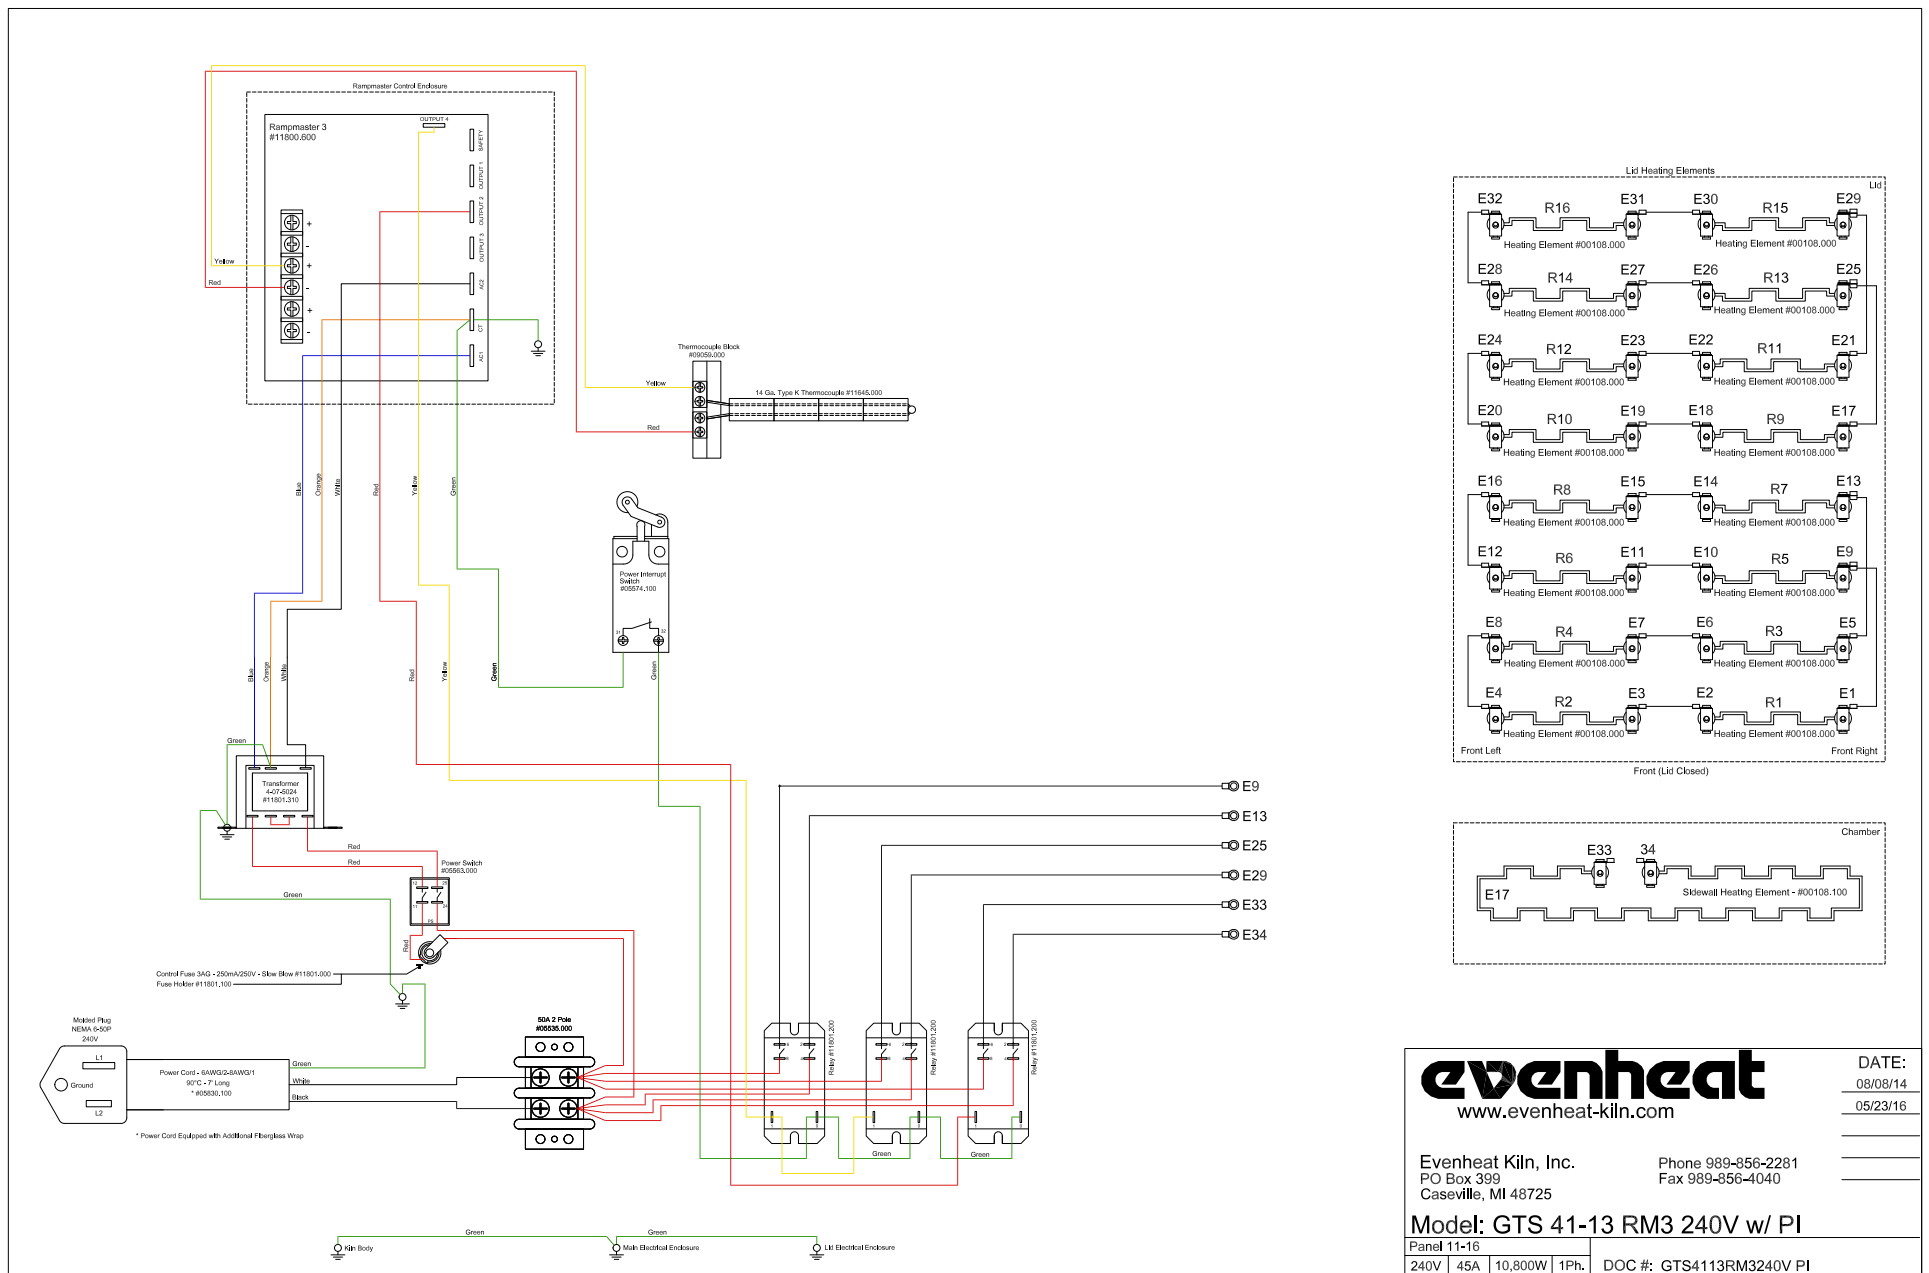


evenheat
www.evenheat-kiln.com

DATE:
08/08/14
05/23/16

Evenheat Kiln, Inc. Phone 989-856-2281
PO Box 399 Fax 989-856-4040
Caseville, MI 48725

Model: GTS 41-13 RM3 240V w/ PI

Panel 11-16
240V | 45A | 10,800W | 1Ph. DOC #: GTS4113RM3240V PI

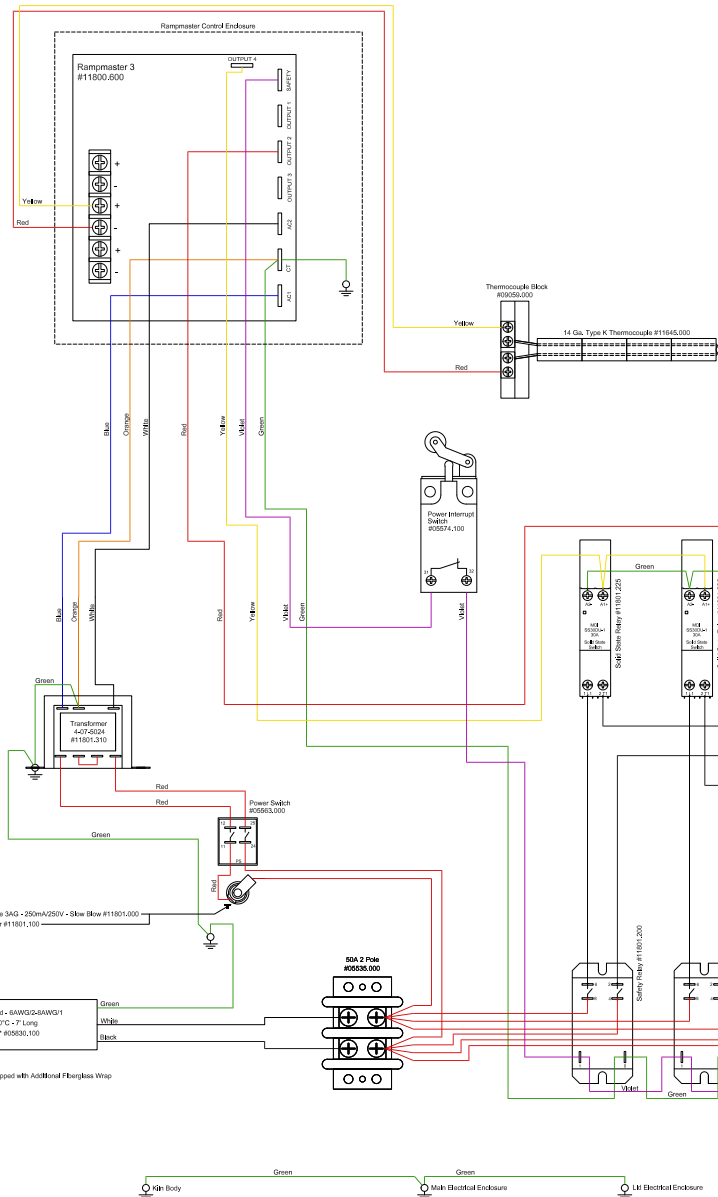

Alternate Solid State Relay Wiring




The "Red" wire connected at the top is always attached to the "+" terminal
The "Green" wire connected at the top is attached to the opposite terminal
The "Black" wires connected at the bottom do not change

The solid state relay(s) will be wired in one of the following two ways

Red on Left (+)
Green on Right



Red on Right (+)
Green on Left

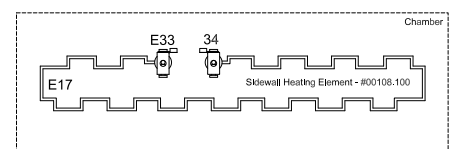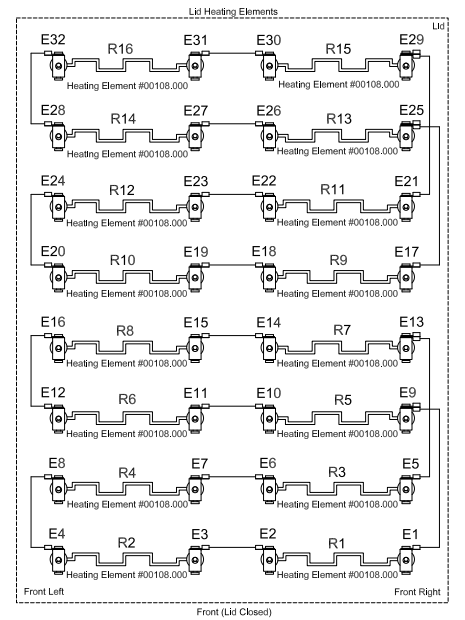

DATE: 05/23/16

evenheat

www.evenheat-kiln.com




Evenheat Kiln, Inc.
PO Box 399
Caseville, MI 48725

Phone 989-856-2281
Fax 989-856-4040

Model: GTS 41-13 RM3 SS 240V w/ PI

Panel 11-16

240V	45A	10,800W	1Ph.	DOC #: GTS4113RM3SS240V PI
------	-----	---------	------	----------------------------

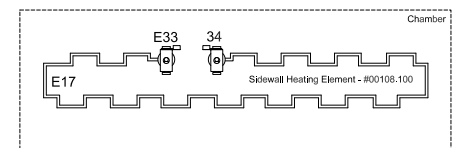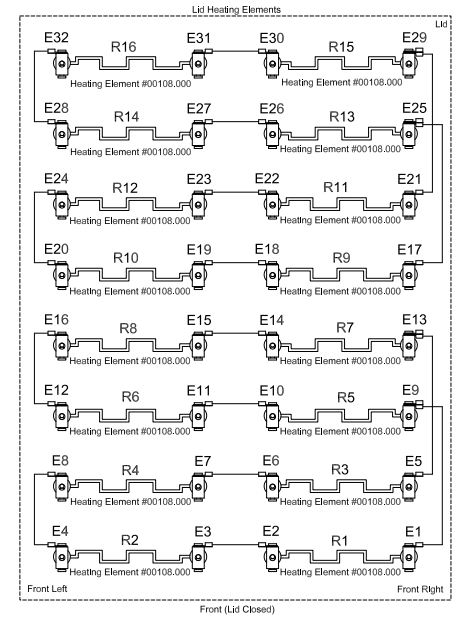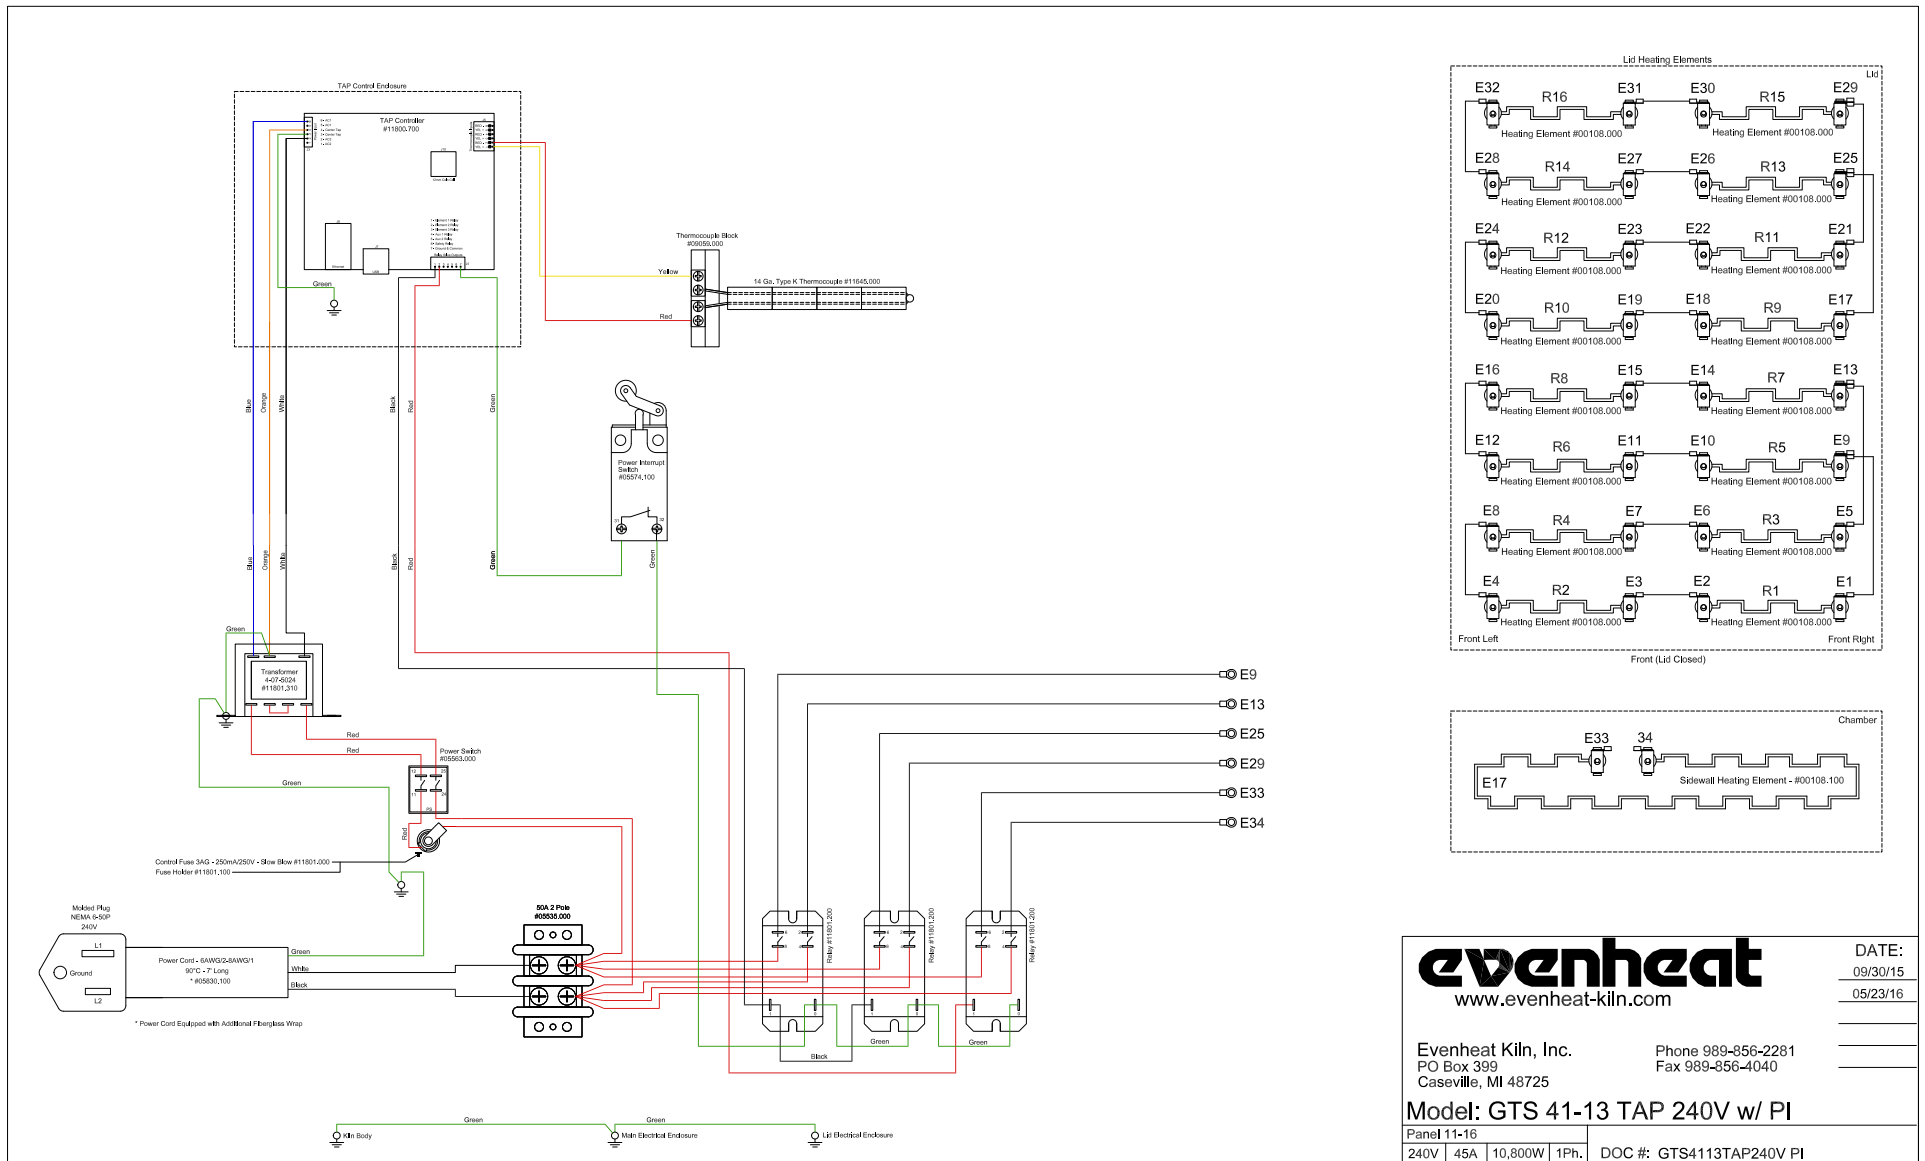



DATE:
09/30/15
05/23/16

www.evenheat-kiln.com

Evenheat Kiln, Inc. Phone 989-856-2281
PO Box 399 Fax 989-856-4040
Caseville, MI 48725





Model: GTS 41-13 TAP 240V w/ PI

Panel 11-16	
240V	45A 10,800W 1Ph.
DOC #: GTS4113TAP240V PI	

Alternate Solid State Relay Wiring

The "Red" wire connected at the top is always attached to the "+" terminal
The "Green" wire connected at the top is attached to the opposite terminal
The "Black" wires connected at the bottom do not change

The solid state relay(s) will be wired in one of the following two ways

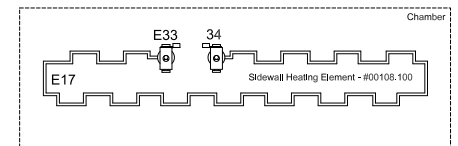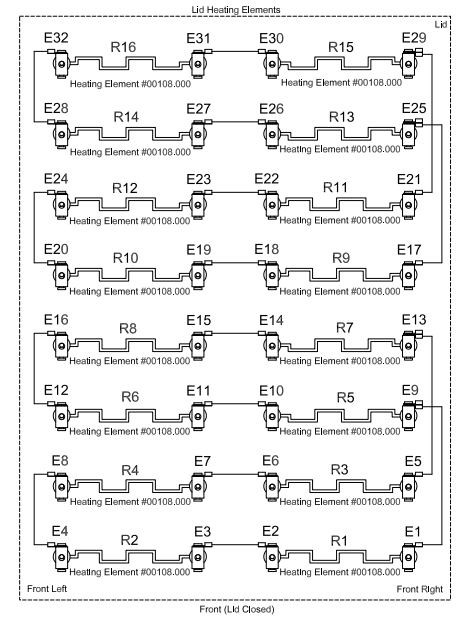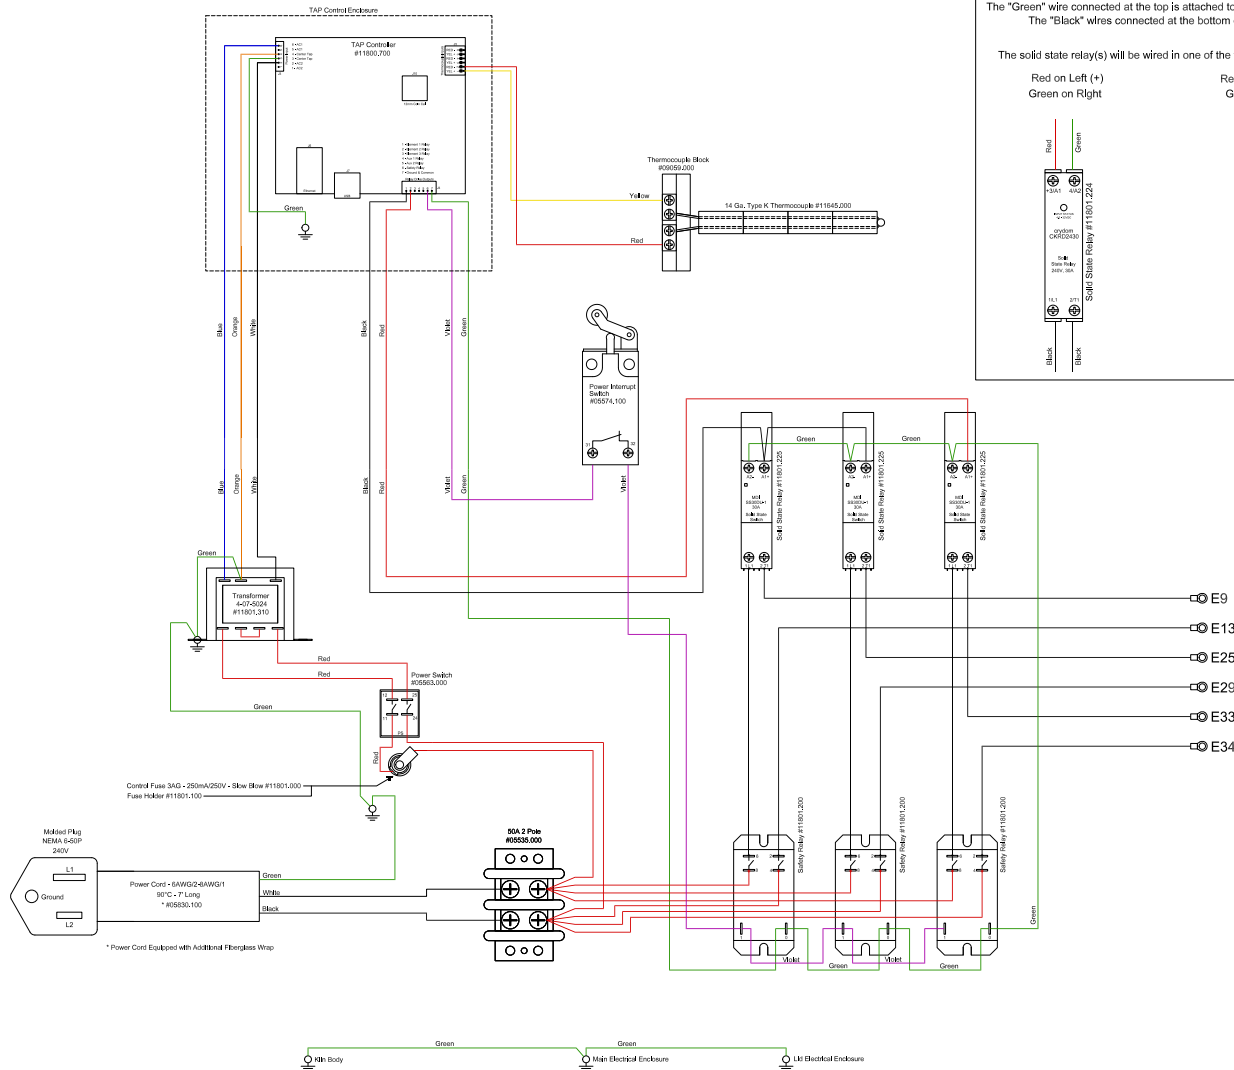

evenheat
www.evenheat-kiln.com

DATE:
05/23/16

Evenheat Kiln, Inc. Phone 989-856-2281
PO Box 399 Fax 989-856-4040
Caseville, MI 48725

Model: GTS 41-13 TAP SS 240V w/ PI

Panel 11-16
240V 45A 10,800W 1Ph. DOC #: GTS4113TAPSS240V PI