Wiring Harness Replacement Instructions

STOP! DO NOT DISCONNECT ANY HARNESS WIRES UNTIL YOU HAVE FULLY READ THESE INSTRUCTIONS!

Step 1 - Remove the Control Box

- 1. Unplug the kiln.
- 2. Remove the screws on the left side of the control box that secure it to the lid
- 3. Remove the numbered element feeder wires and labeled thermocouple wires from the terminal strip
- 4. Lift the control box off the kiln and place it (controller face down) on a flat protected surface
- 5. Remove the baffle screws located on both sides of the control box
- 6. Carefully lift the baffle out of the box and roll it over the side. It will still be connected by relay and thermocouple wires on the inside, so be careful not to strain those connections.


Step 2 - Determine which Wiring Diagram to use


The wiring diagram that you need to use will be determined by 4 factors:


- 1. Controller Version 200, 300, 600 or 700
- 2. Relay Type Deltrol or Potter & Brumfield
- 3. Kiln Model
- 4. Phase 1 PH or 3 PH


Controller Type

Identify which controller you have by number and location of tabs on the back of your controller.









Relay Type

Identify your relay type. Deltrol Relays have a clear plastic case and the connections are made on the end of the relay. Potter Brumfiled Relays are black and the connections are made on the face of the relay.







If you have a Relay Upgrade Kit installed

We are suggesting you revert back to the Deltrol Relays with the new and improved harness wire set. If you have a Relay Upgrade Kit installed, remove the adapter plate used to angle the relays and mount the new Deltrol Relays straight up and down as before the upgrade.

Note: Some customers unknowingly installed Relay Upgrade Kits on models that did not require it. If your controller box has 6 louvers on the top (instead of 5) you are one of these people and should continue to use the Potter & Brumfield relays with the new 12 gauge harness wire set. Use the wiring diagram for your recommended relay.

Kiln Model & Phase Identification

The phase and Model # are designated on the serial plate on the side of the control box.

Step 3A - Relay and Harness Wire Removal

- 1. It may NOT be necessary to replace wires #5, #6 and #7 unless they are compromised. These are connected to the transformer and fuse holder; both of which can be damaged if not handled with care. Disregard relay replacement references in the following instructions if you are only changing your harness wires.
- 2. Using a Phillips screwdriver, remove the wires attached to the heat baffle terminal strip. Save your screws. If you want to get the heat baffle entirely out of the way, remove the remaining red and yellow thermocouple wires.
- 3. Begin removal of the old relays from the control box by removing the sheet metal screws holding the relays in place. Save your screws. All wires, both white(black on older units) and red, connected to the relays will be removed. With the relays loosened, remove the two large screws on the terminal block holding the relay wiring in place. The wires at this point should be crimped into two large silver connectors that also will contain one red wire each. Follow each red wire and remove the push-on connectors from the fuse holder and the transformer bottom tab. Use a gentle side to side rocking and pulling motion to remove these connectors. Be especially careful when removing the connector from the transformer to avoid damaging it. Remove the red connector from the top-center transformer tab also. Remove the double red wire on the circuit board labeled center tab. Carefully pull the relays and all attached wires out of the control box.
- 4. Refer to image #1 to ensure that all of the relays and proper wiring have been removed.

Page 2 of 41 10.7 REV 10/01/15


Installing New Relays and Harness Wires

- 1. Install new relays using the old sheet metal screws you saved earlier. See diagram for proper orientation.
- 2. Use Wire Identification Sheet in conjunction with the Wiring Diagram to install the wires in their correct position. The wires are numbered on the Wire Identification Sheet and Diagram to make this easier. It is easier if you begin with all the red control wires. Make sure all the connectors are tight.
- 3. Reinstall the baffle
- 4. Re-hang the control box, attach the wires to the terminal strip and secure with screws.
- 5. Plug in the kiln and perform a test firing to make sure everything is operating correctly.


REPAIRS

Page 3 of 41 10.7 REV 10/01/15


KETAIKU

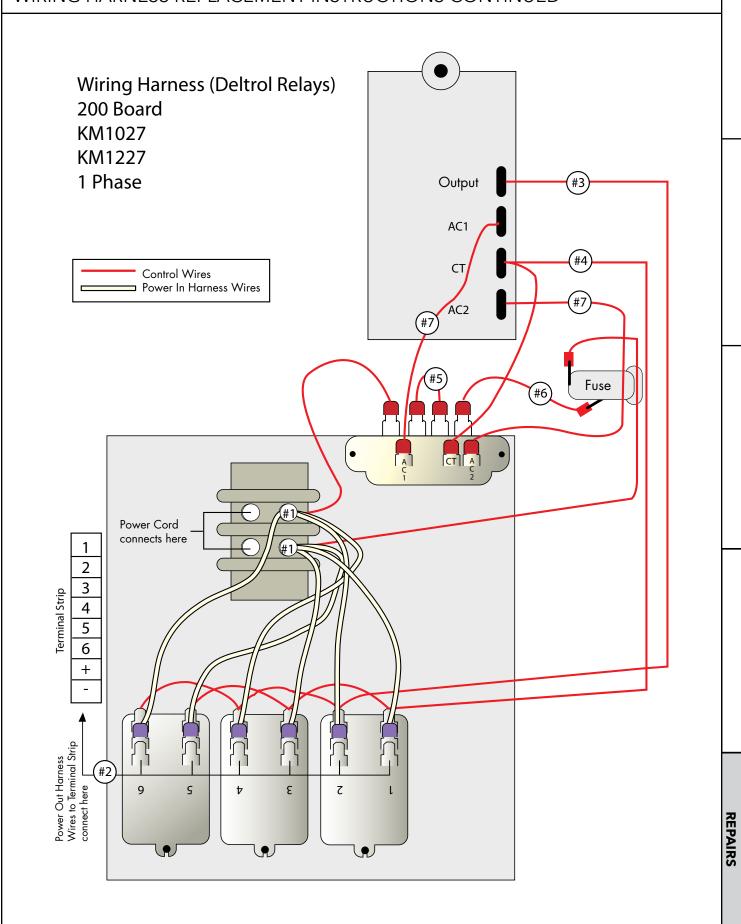


Page 5 of 41

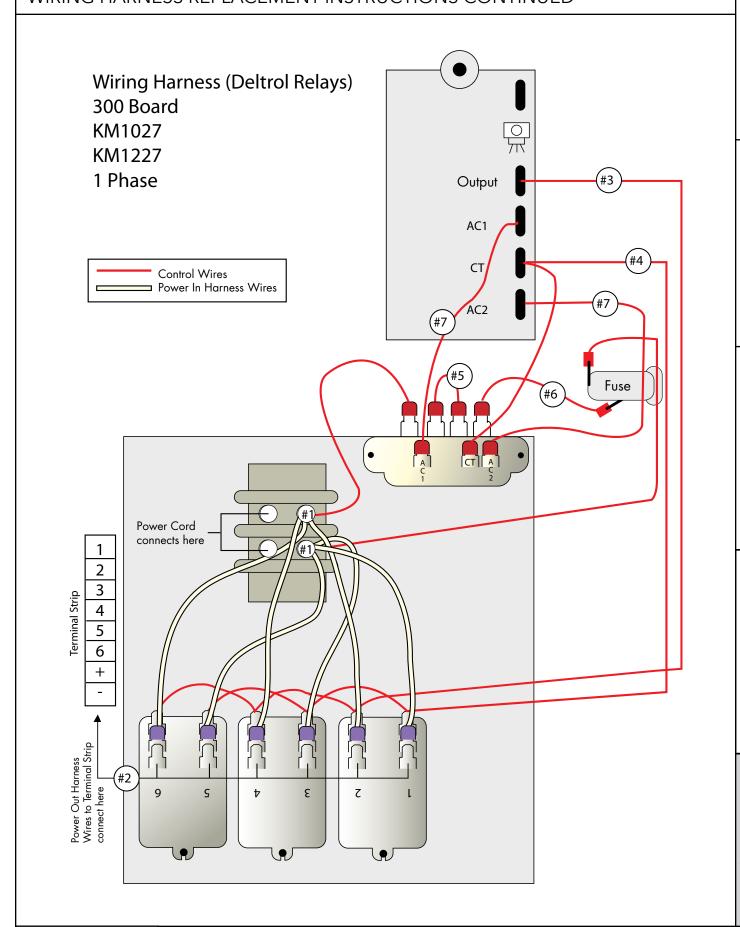

Page 6 of 41

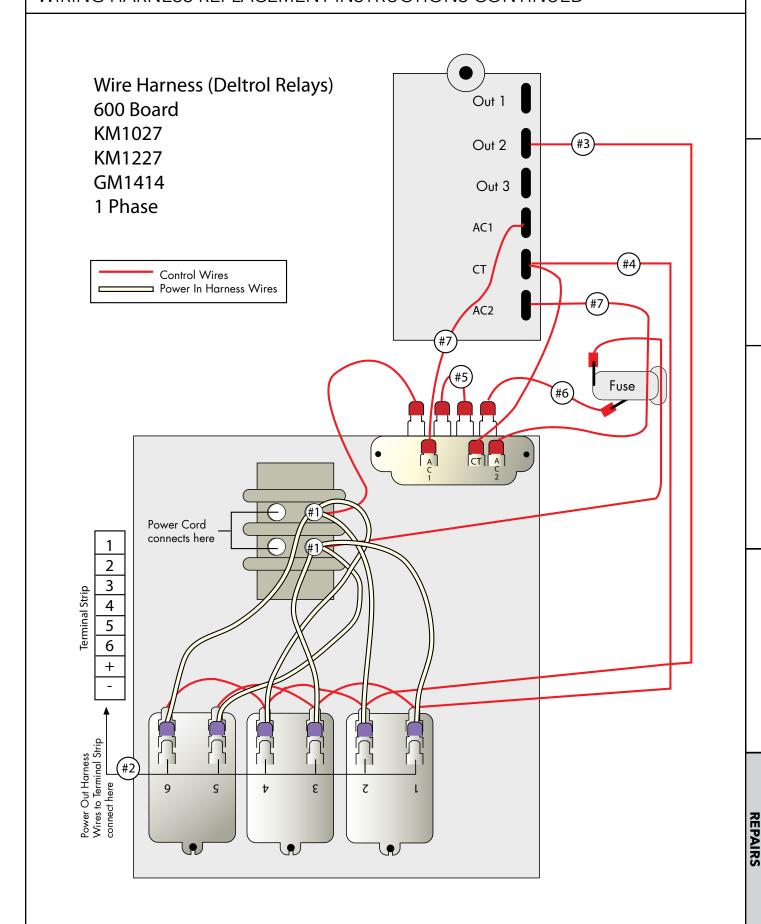


Page 7 of 41

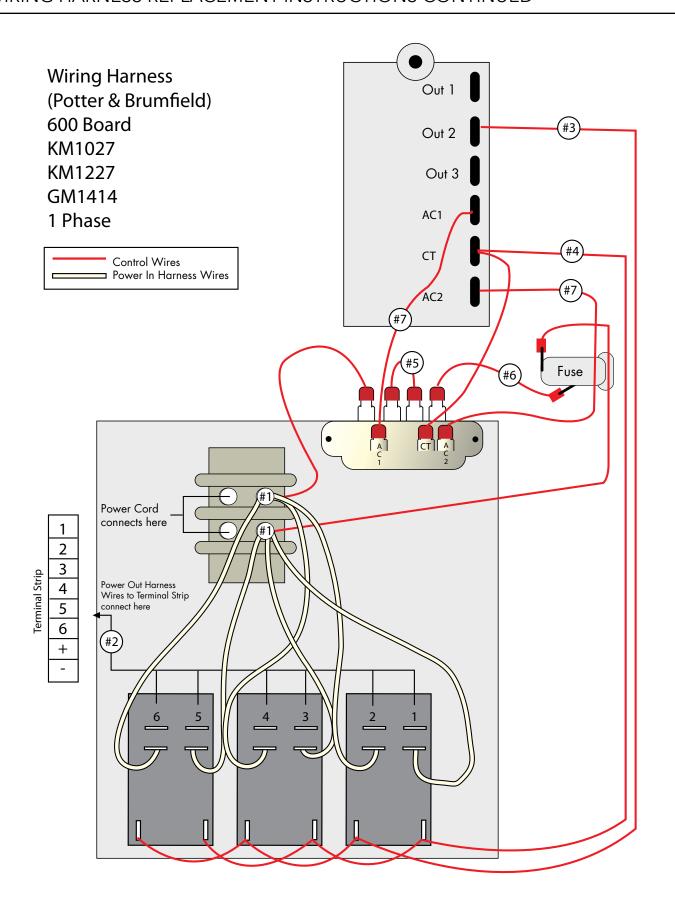

Page 8 of 41


10.7 REV 10/01/15

WIRING HARNESS REPLACEMENT INSTRUCTIONS CONTINUED

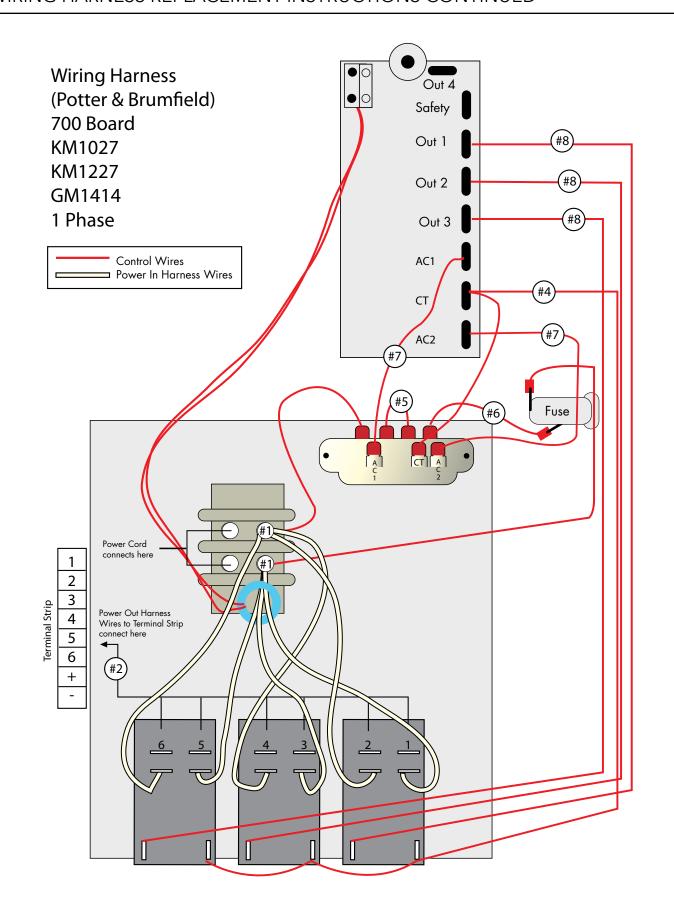


Page 9 of 41


CEPAIRS

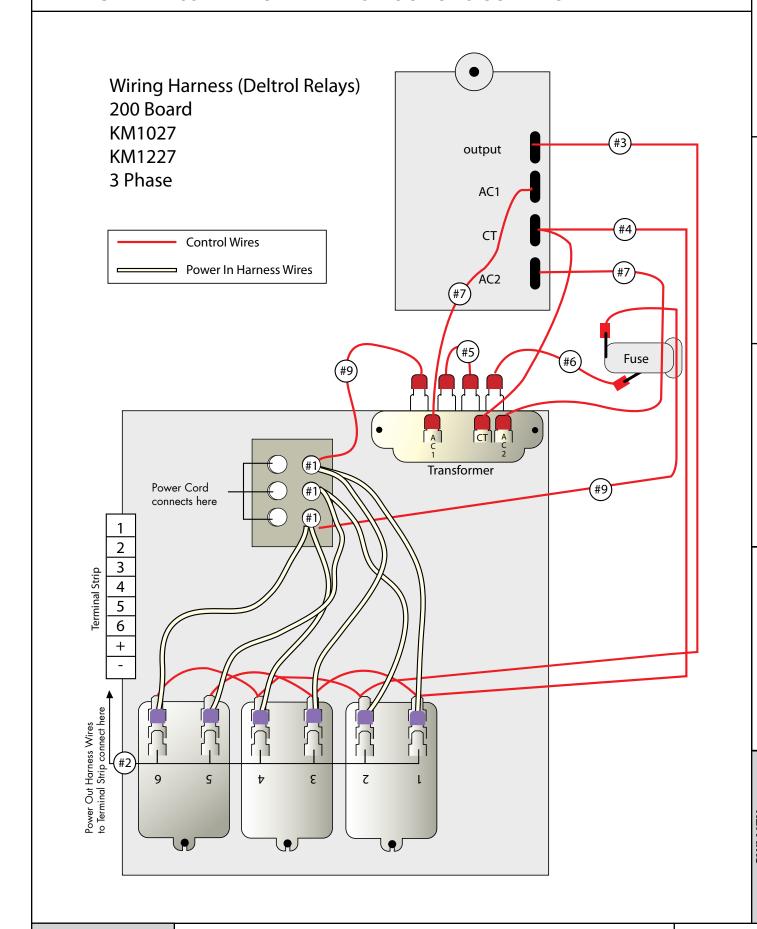


Page 11 of 41

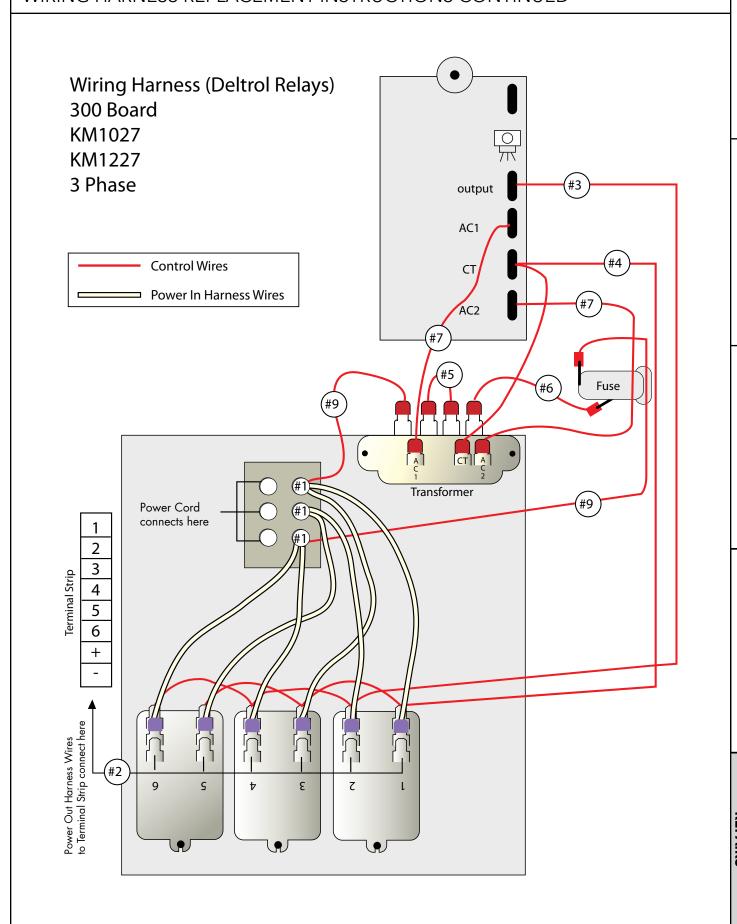


Page 12 of 41

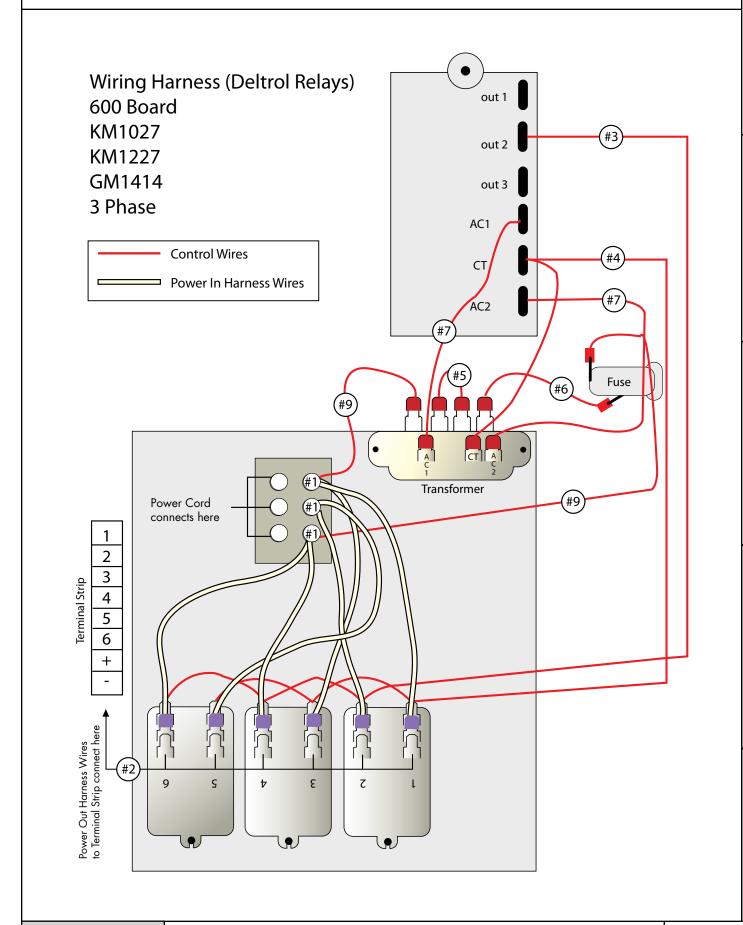


Page 13 of 41

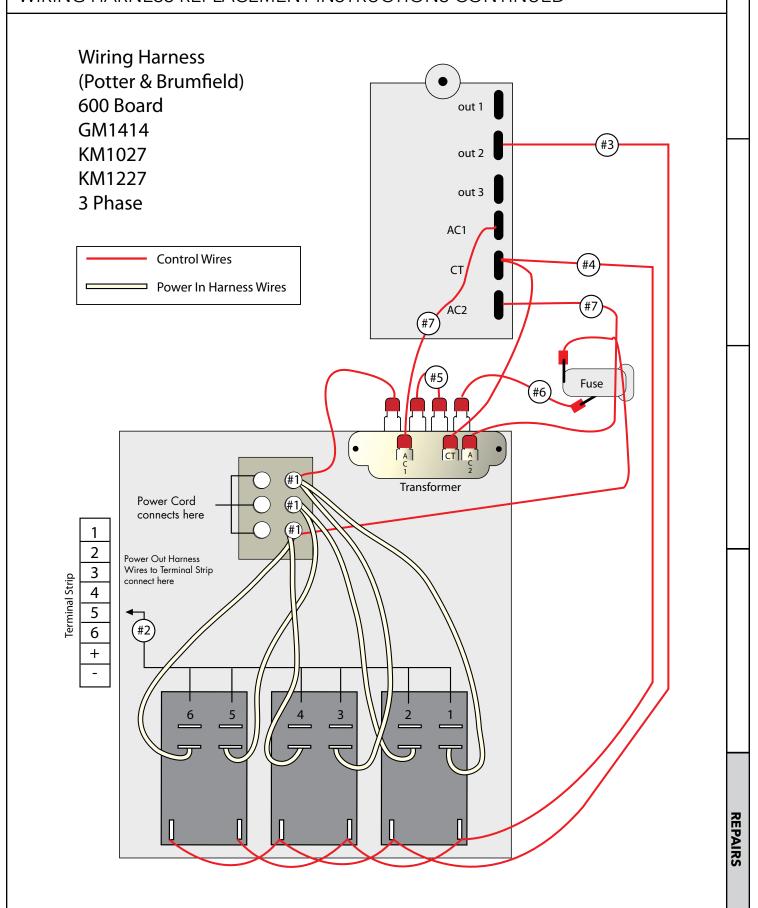


Page 14 of 41

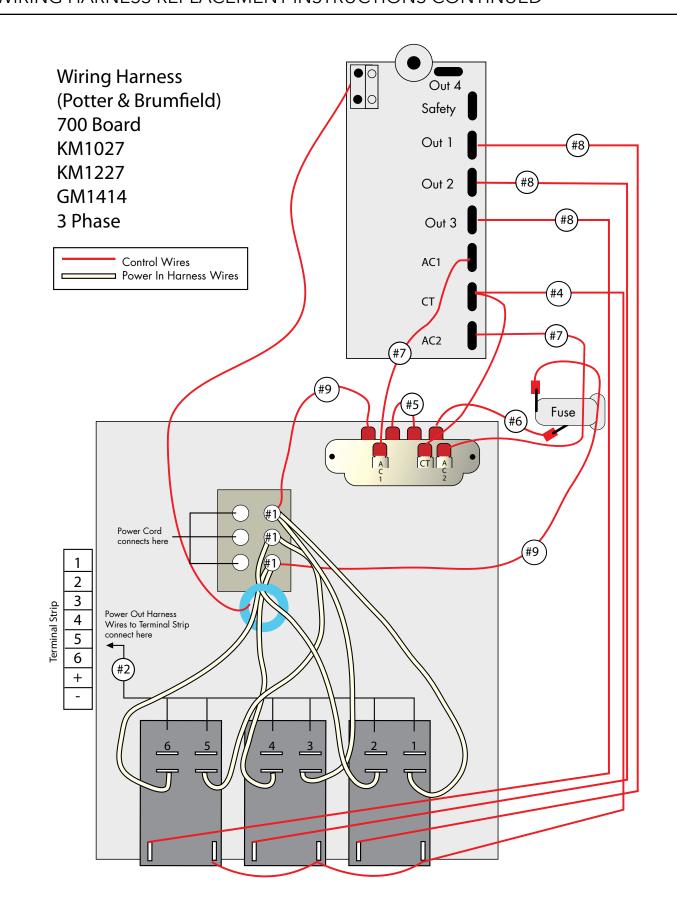


Page 15 of 41

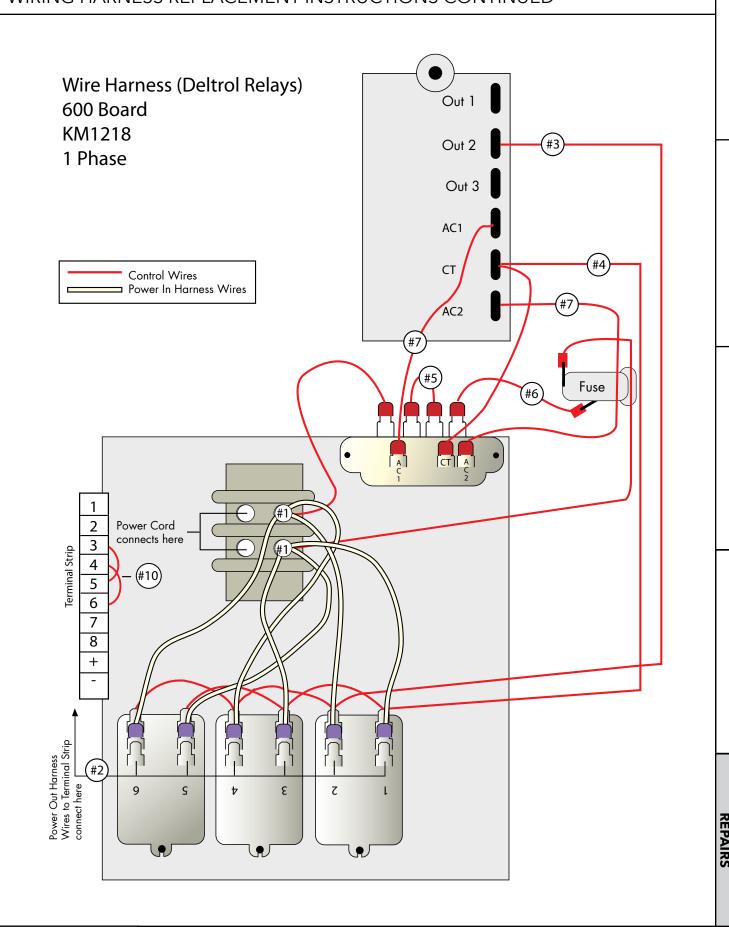

Page 17 of 41

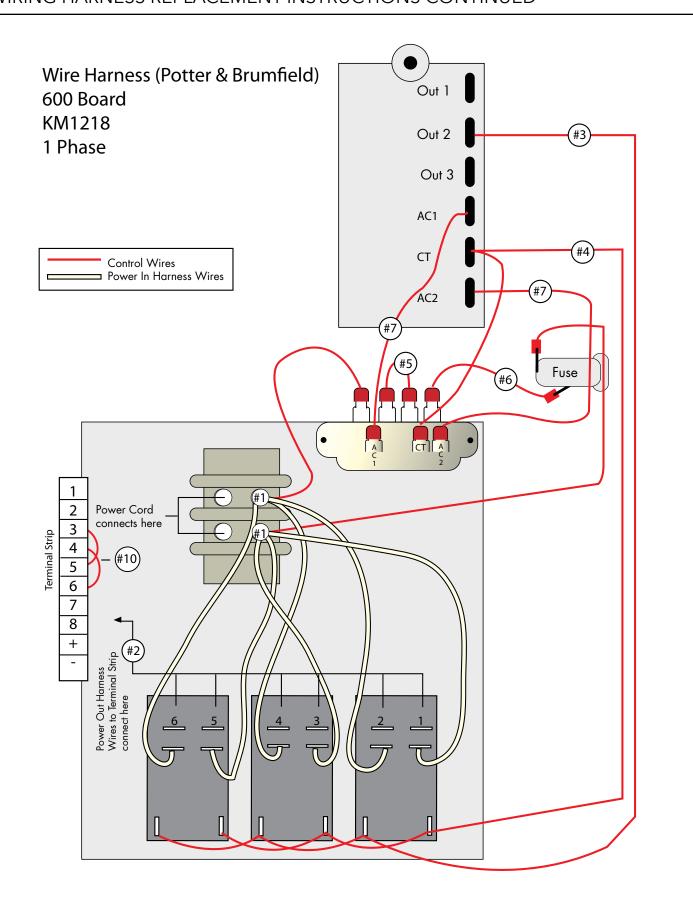


Page 19 of 41 10.7 REV 10/01/15

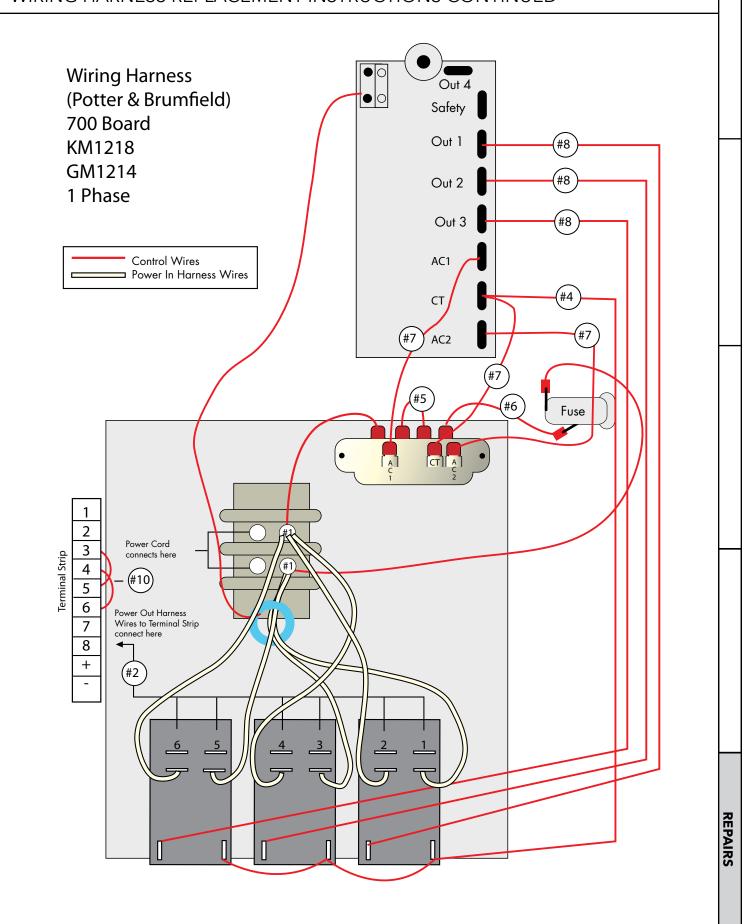


Page 19 of 41


REPAIRS

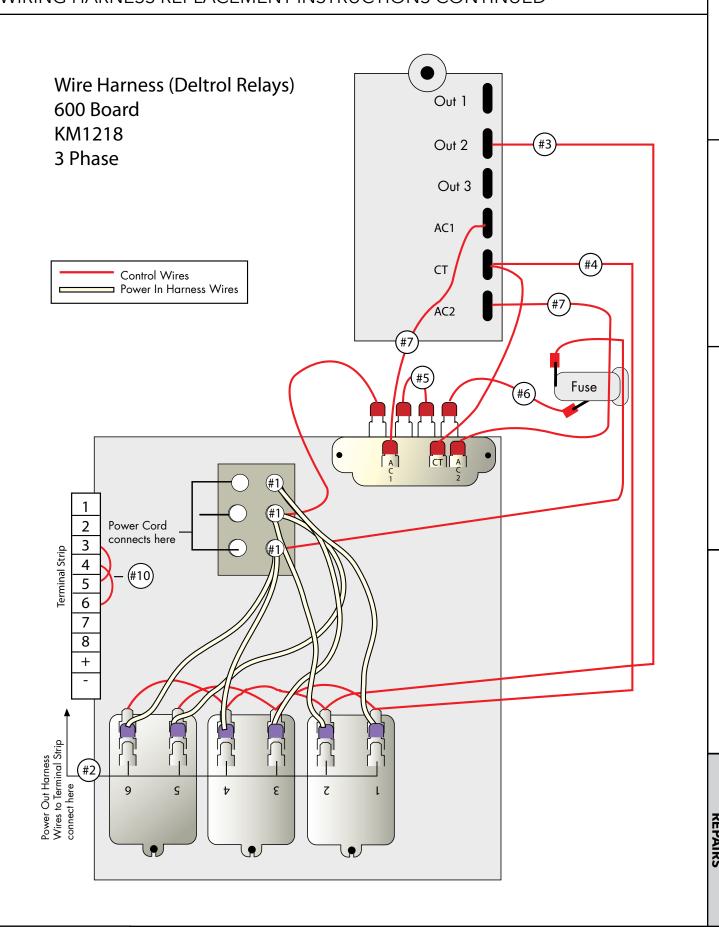

Page 21 of 41

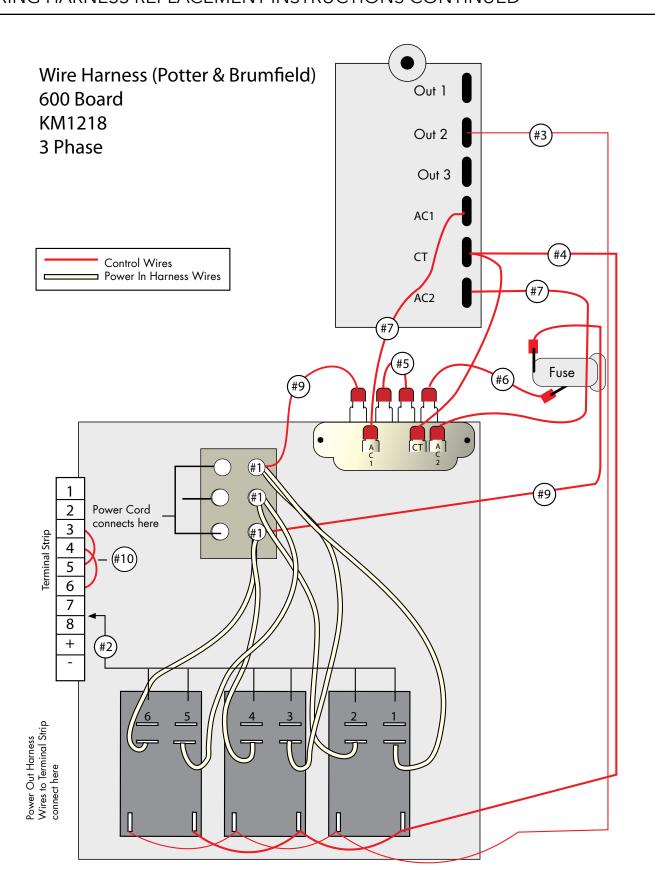


Page 22 of 41 10.7 REV 10/01/15

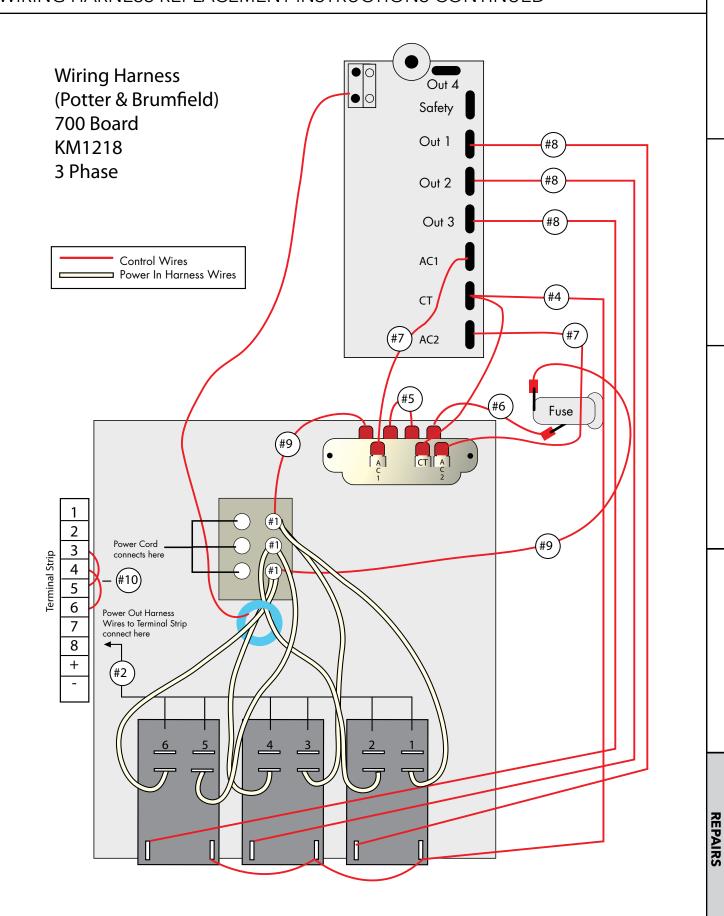


Page 23 of 41


WIRING HARNESS REPLACEMENT INSTRUCTIONS CONTINUED Wiring Harness (Deltrol Relays) 200 Board KM818 KM1018 1 Phase Output #3 AC1 Control Wires ■ Power In Harness Wires AC2 Fuse #6 **#1**) Power Cord connects here 3 Terminal Strip 4 5 6 Power Out Harness Wires to Terminal Strip connect here

Page 25 of 41

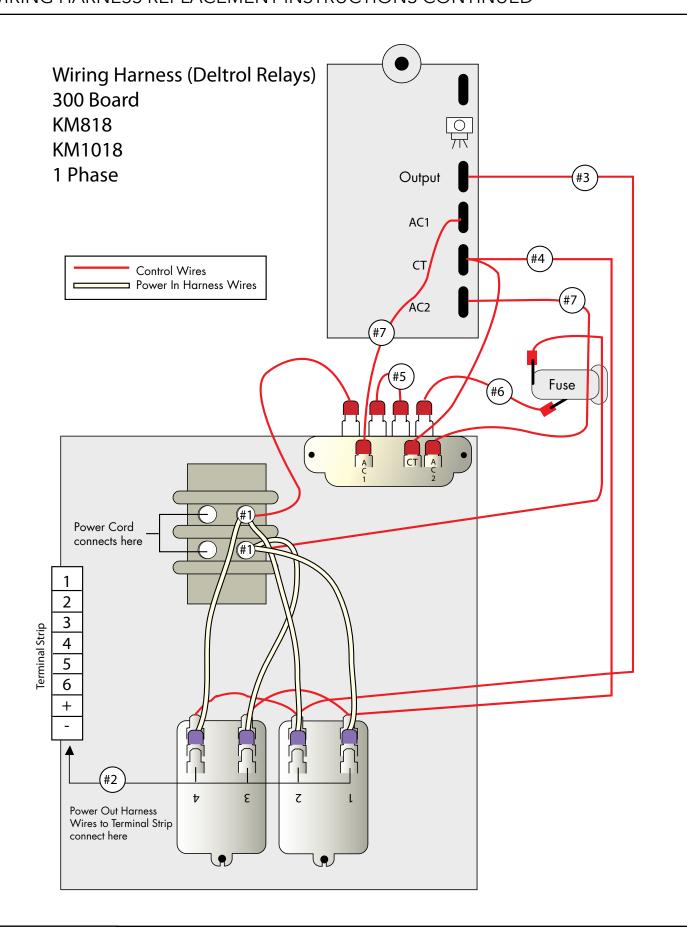


Page 26 of 41

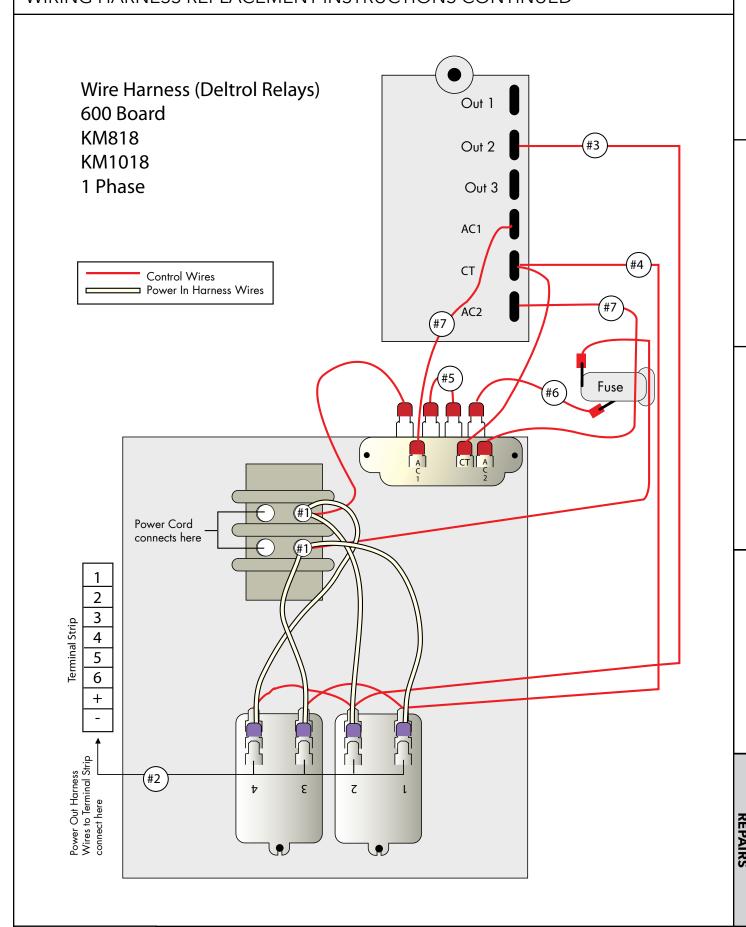

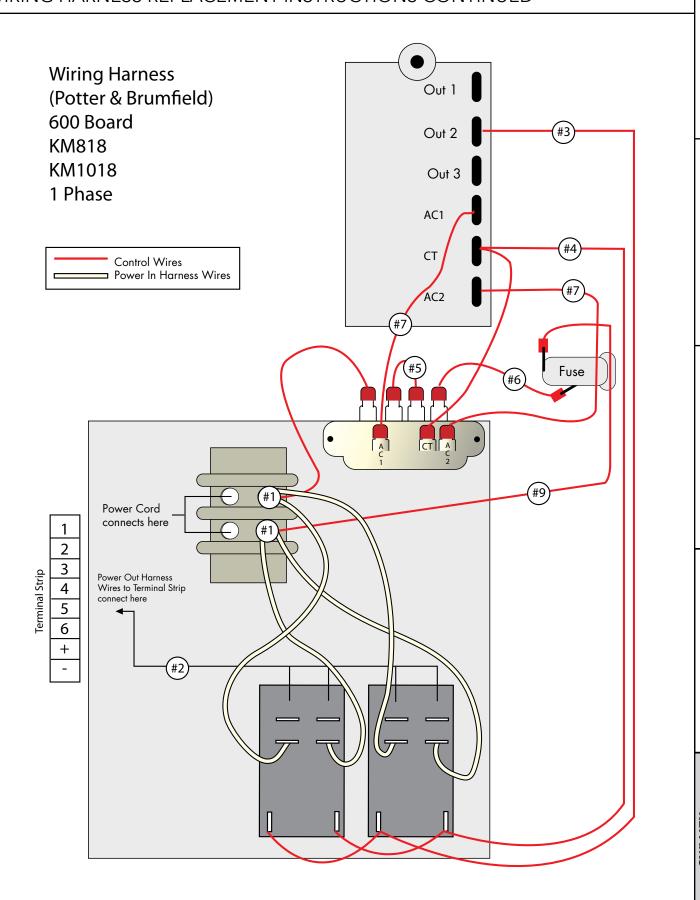



Page 28 of 41

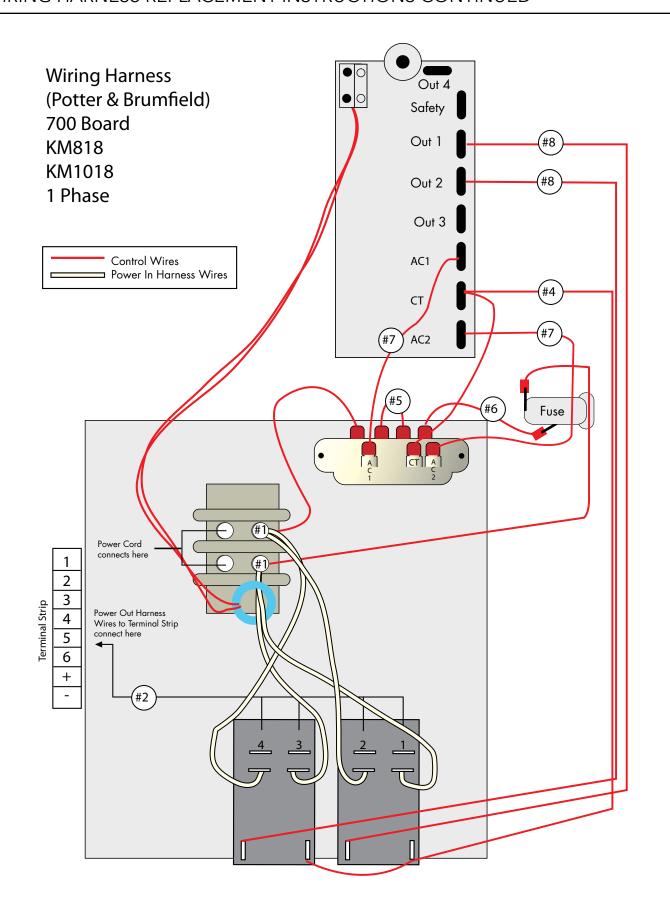

Page 29 of 41

2565

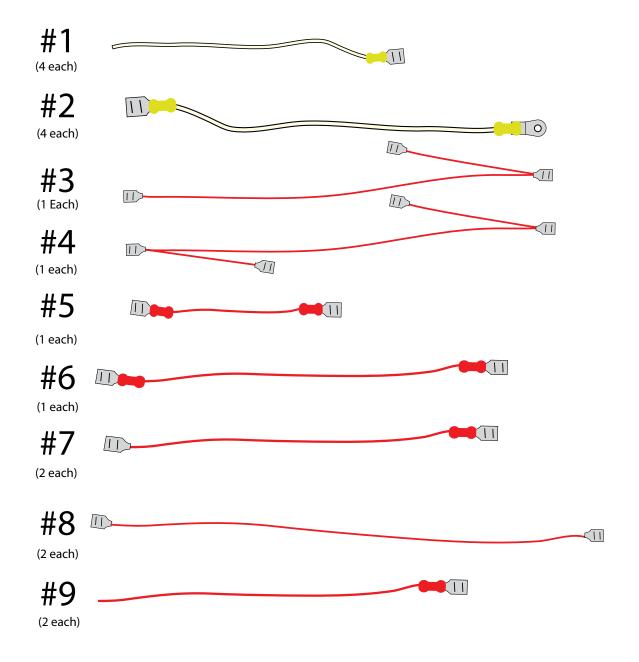


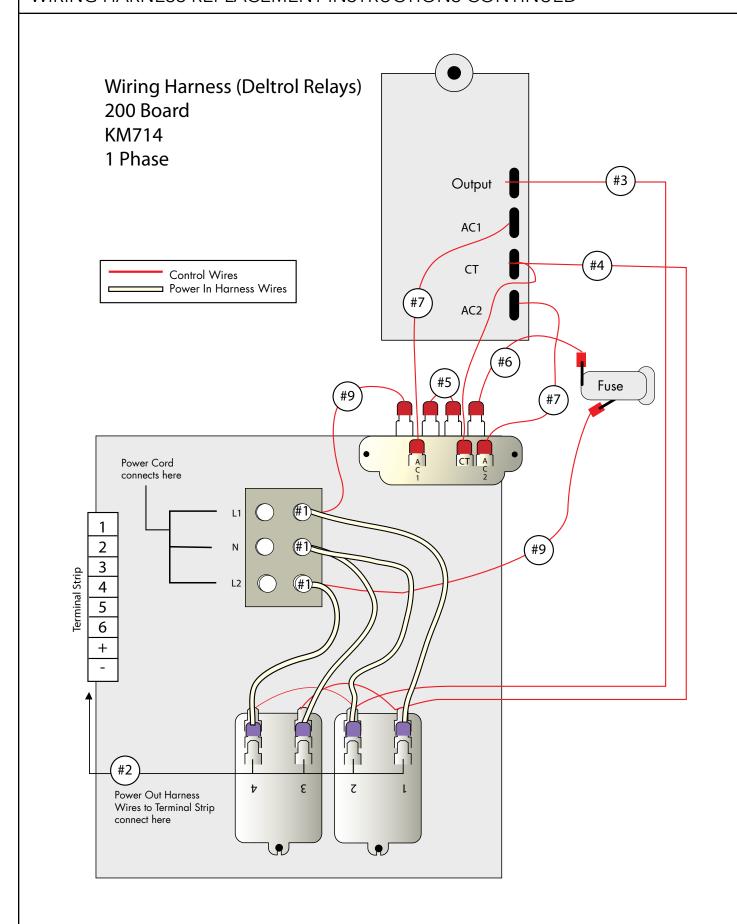


Page 31 of 41

Terminal Strip

Page 33 of 41

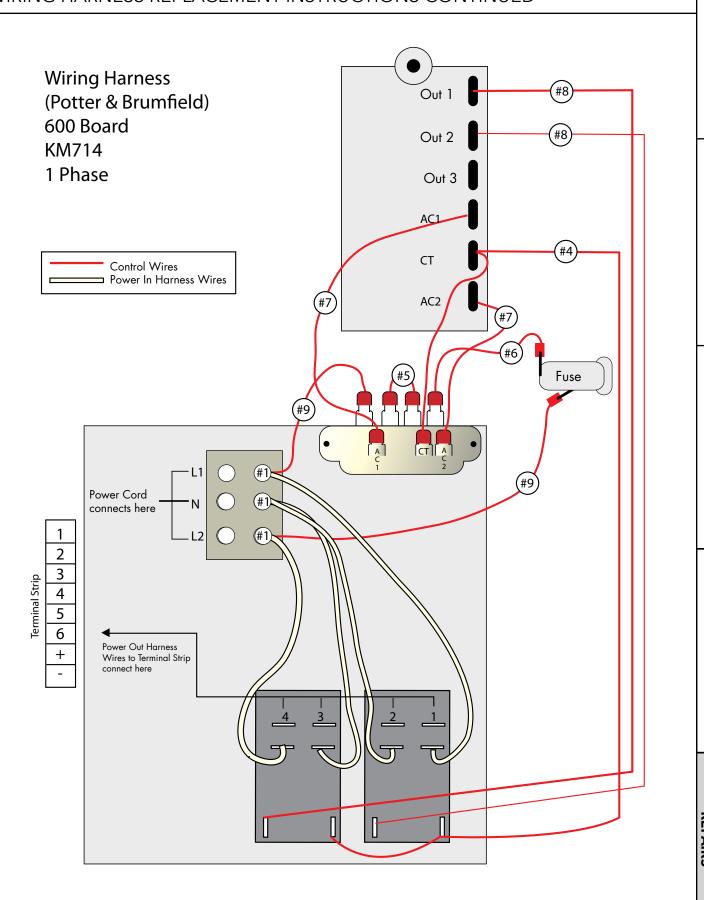


Page 34 of 41

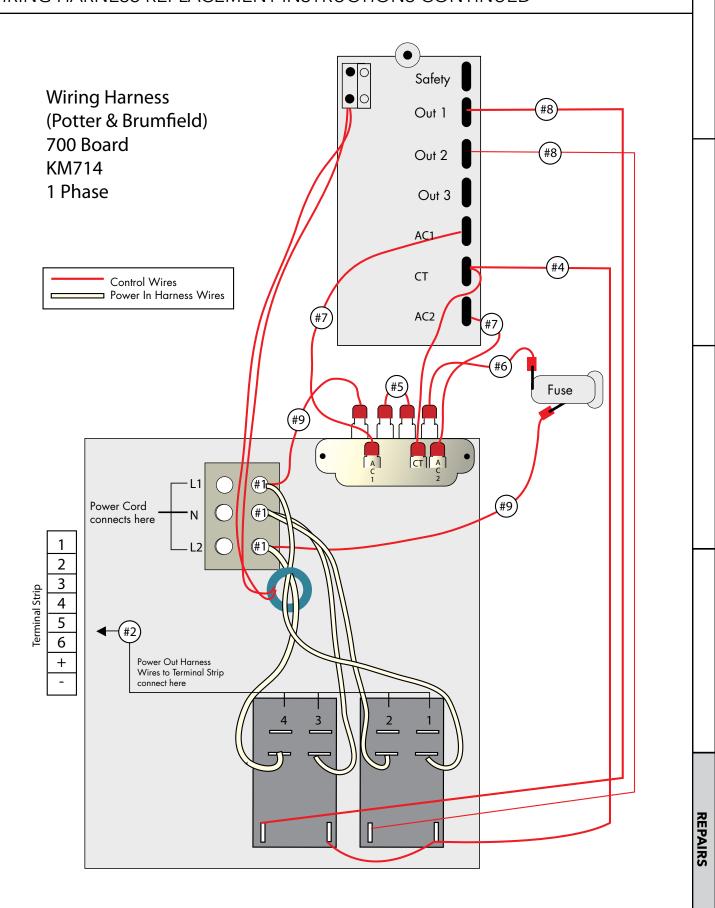


Page 35 of 41

KETAIKU

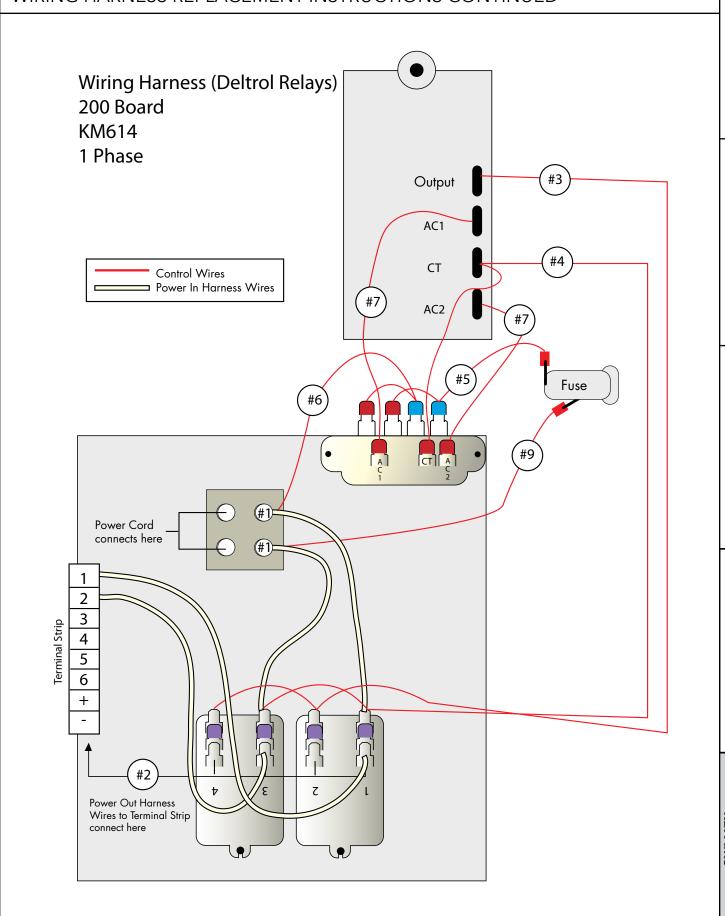


Page 37 of 41

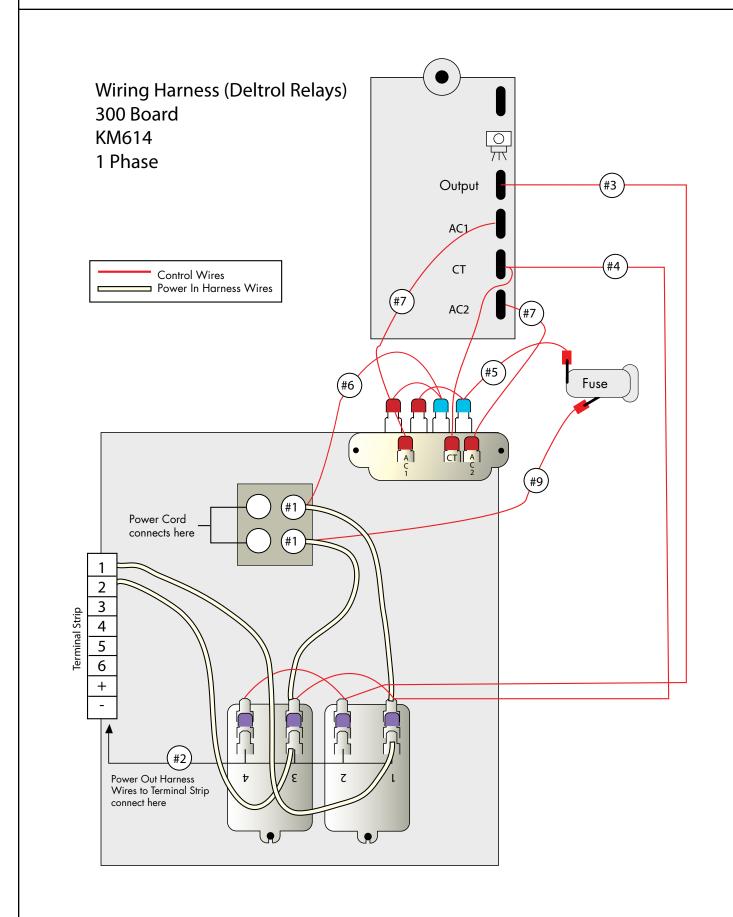


Page 38 of 41 10.7 REV 10/01/15

Page 39 of 41

Terminal Strip

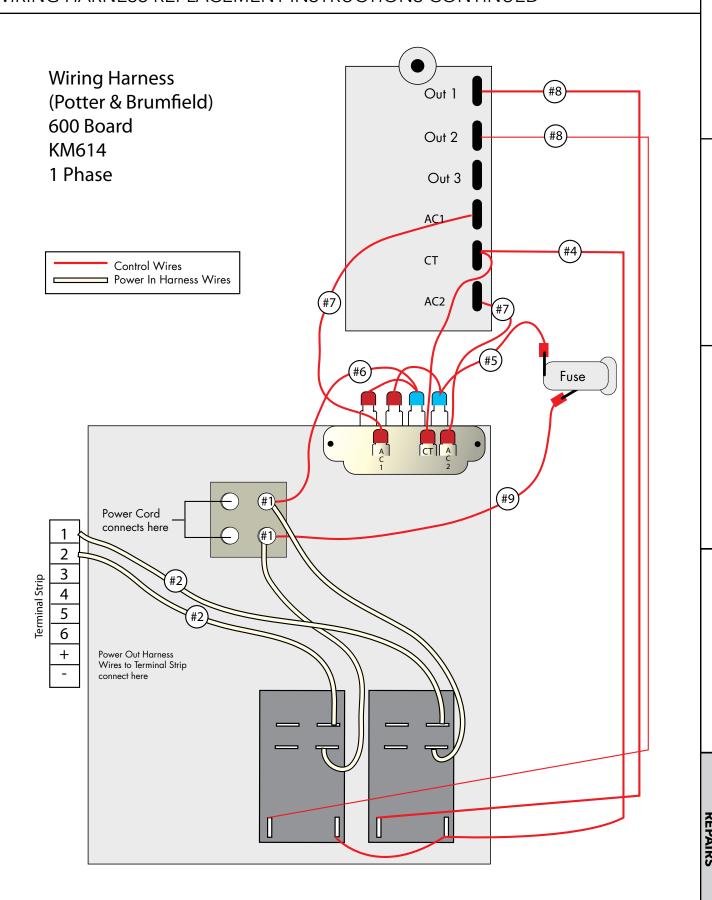

Page 40 of 41

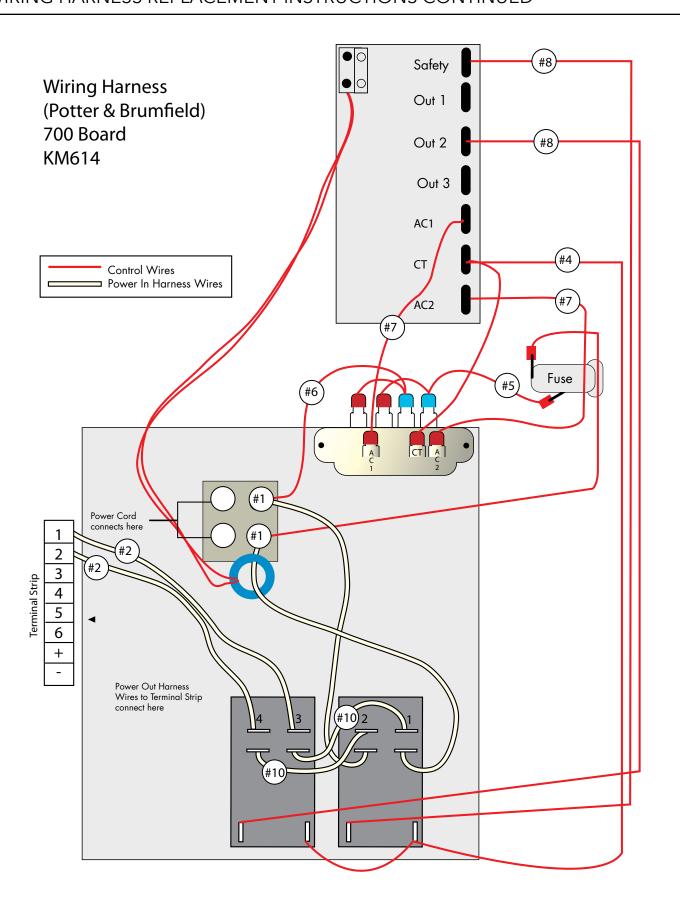

Page 41 of 41 10.7 REV 10/01/15